


# MA12

SURFACE

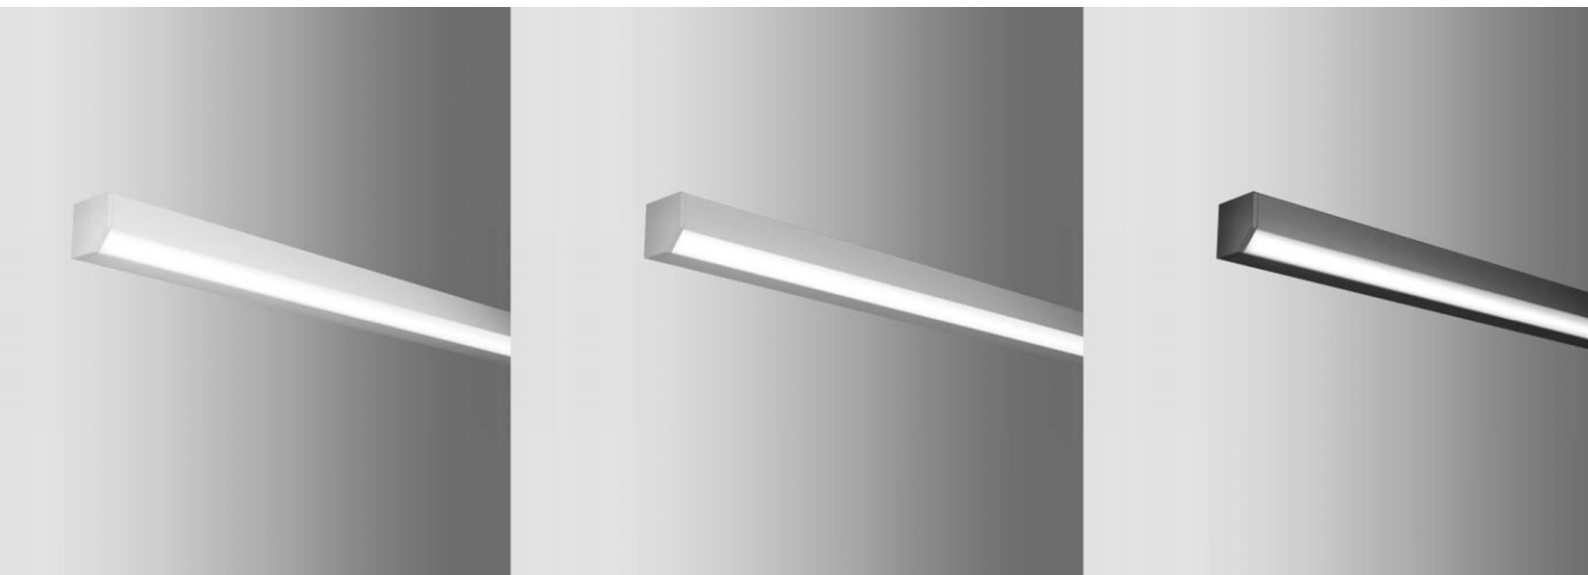


## MONOLINE-MA12

A surface mounted extruded aluminium profile manufactured from high-density aluminium with powder coated (white, grey or black) finish and opal diffuser.


MONOFLEX LED available in static white, tunable white and dynamic colour changing, with a choice of Nichia, Osram or Lumileds LED.

## TECHNICAL

<b>Housing:</b>	Anodised Aluminium
<b>Diffuser:</b>	Polycarbonate UV Stabilised
<b>Lengths:</b>	3000mm
<b>Max LED Wattage:</b>	24w/m
<b>Max PCB Width:</b>	12mm
<b>Hot-Spot Free:</b>	≥112 LED/m
<b>Weight:</b>	0.55kg/m
<b>IP Rating:</b>	IP40




## FINISH




## CATALOGUE NO.

<b>MA12-W-3-OC</b>	3000mm matt white with opal diffuser
<b>MA12-B-3-OC</b>	3000mm matt black with opal diffuser
<b>MA12-A-3-OC</b>	3000mm aluminium with opal diffuser


## ACCESSORIES



MA12-MB 1 bracket every metre (2 min)



MA12-ECL Left-hand end cap



MA12-ECR Right-hand end cap