

ML45

TRIMLESS




MONOLINE-ML45

An extruded aluminium profile finished in matt white, with opal diffuser. Designed to create concealed, indirect, lighting details around the perimeter of the room, producing an even wash of light with a knife-edge finish to the ceiling/wall.

Each PCB module has an on-board Integrated Controller (IC), for precise constant current control, whilst a Schottky diode provides reverse polarity protection. A range of LED options are available with a choice of Nichia, Osram or Lumileds LED, with colour temperatures from 2000K - 6500K and power outputs from 4.8W/m - 24.0W/m.

TECHNICAL

Housing:	Anodised Aluminium
Diffuser:	Polycarbonate UV Stabilised
Lengths:	3000mm
Max LED Wattage:	24w/m
Max PCB Width:	12mm
Hot-Spot Free:	≥112 LED/m
Weight:	1.102kg/m
IP Rating:	IP40

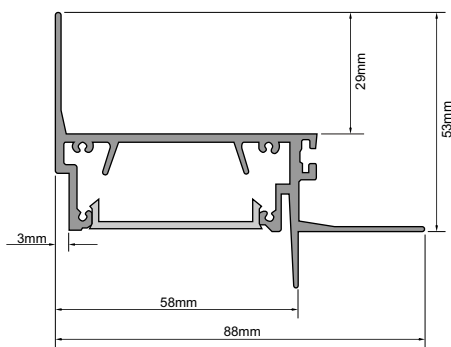


FINISH



CATALOGUE NO.

ML45-W-3-OC	3000mm matt white with opal diffuser
ML45-W-3-PC	3000mm matt white with prismatic diffuser

ACCESSORIES



ML45-EC Aluminium end cap



ML45-LC Linear connector