



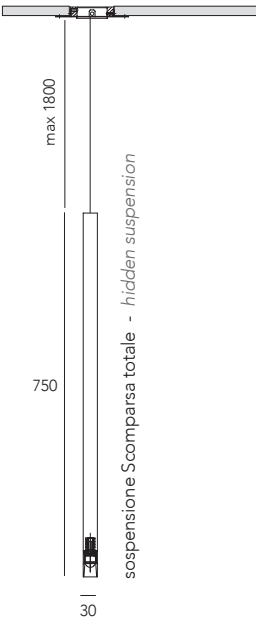
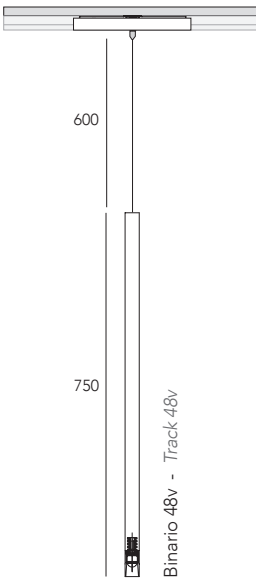


Slim Suspension

CONFIGURA ONLINE
macrolux.store

Alimentatore remoto 150mA
150mA remote power supply

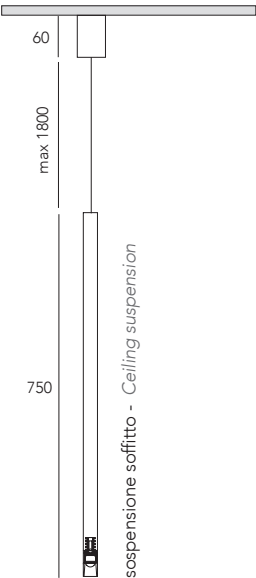

2 nero
black

4 bianco
white

96 bronzo
bronze

Slim - ceiling suspension

1912.750.01.--

2 4 96

5,5W, 700lm, CRI>90, 3000°K,

cod. 1912.750.01.2700.-- per 2700°K

cod. 1912.750.01.4000.-- per 4000°K



Slim track - suspension

1912.750.03.--

2 4 96

5,5W, 700lm, CRI>90, 3000°K,

cod. 1912.750.03.2700.-- per 2700°K

cod. 1912.750.03.4000.-- per 4000°K



Slim - hidden suspension

1912.750.00.--

2 4 96

5,5W, 700lm, CRI>90, 3000°K,

cod. 1912.750.00.2700.-- per 2700°K

cod. 1912.750.00.4000.-- per 4000°K



Slim track, suspension

1912.750.0310.--

2 4 96

5,5W, 700lm, CRI>90, 3000°K,

cod. 1912.750.0310.2700.-- per 2700°K

cod. 1912.750.0310.4000.-- per 4000°K



Plaster kit / kit da stuccare

2015.0000 kit da stuccare per cartongesso

Photographic: pag. 270